

1010 Rec 11-07-00 23 DEC 2001

FORM PTO-1390 (Modified) (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER (H)01PH0406USP	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 10/019868	
INTERNATIONAL APPLICATION NO PCT/DE00/02047		INTERNATIONAL FILING DATE 30 June 2000		PRIORITY DATE CLAIMED 3 July 1999	
TITLE OF INVENTION Method for Quasi-Continuous Transmission of a Temporally Variable Parameter					
APPLICANT(S) FOR DO/EO/US Burkhard Werner					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371</li> <li>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.</li> <li>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2)) <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau)</li> <li>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau)</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau</li> <li>c. <input type="checkbox"/> have not been made, however, the time limit for making such amendments has NOT expired</li> <li>d. <input type="checkbox"/> have not been made and will not be made</li> </ol> </li> <li>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))</li> <li>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4))</li> <li>10. <input checked="" type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> <li>11. <input checked="" type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409)</li> <li>12. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210).</li> </ol>					
Items 13 to 20 below concern document(s) or information included:					
<ol style="list-style-type: none"> <li>13. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included</li> <li>15. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment</li> <li>16. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment</li> <li>17. <input checked="" type="checkbox"/> A substitute specification</li> <li>18. <input type="checkbox"/> A change of power of attorney and/or address letter</li> <li>19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter 2 and 35 U.S.C. 1.821 - 1.825</li> <li>20. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4)</li> <li>21. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4)</li> <li>22. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail</li> <li>23. <input checked="" type="checkbox"/> Other items or information</li> </ol>					
General Authorization to Charge Fees 3 Sheets of formal drawings					

531 Rec'd PCT

23 DEC 2001

APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/019008

INTERNATIONAL APPLICATION NO.

PCT/DE00/02047

ATTORNEY'S DOCKET NUMBER

(H)01PH0406USP

24. The following fees are submitted

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .... \$890.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO .... \$740.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) . . . \$710.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) . . . \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =****\$890.00**

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e))

**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	17 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00

**\$0.00****\$0.00**

Multiple Dependent Claims (check if applicable).

**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$890.00**

- ☐ Applicant claims small entity status See 37 CFR 1.27) The fees indicated above are reduced by 1/2.

**\$0.00****SUBTOTAL =****\$890.00**

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

**\$0.00****TOTAL NATIONAL FEE =****\$890.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)) The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

**\$0.00****TOTAL FEES ENCLOSED =****\$890.00**

Amount to be:

\$

charged

\$

- a. ☒ A PTO 2038 \$890.00 to cover the above fees is enclosed
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees  
A duplicate copy of this sheet is enclosed
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0665 A duplicate copy of this sheet is enclosed
- d. ☒ Fees are to be charged to a credit card **WARNING:** Information on this form may become public **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO

M. Robert Kestenbaum  
11011 Bermuda Dunes NE  
Albuquerque, NM USA 87111  
Phone (505) 323-0771  
Fax (505) 323-0865

SIGNATURE

M. Robert Kestenbaum

NAME

20,430

REGISTRATION NUMBER

December 23, 2001

DATE

10/019888

Applicant Werner  
Attorney Docket (H)01PH0406USP

531 Rec'd PCT/PT 23 DEC 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Re: International Application PCT/DE00/02047  
Filed June 30, 2000  
Title Method for Quasi-Continuous Transmission of a  
Temporally Variable Parameter  
Applicant Werner  
Attorney Docket (H)01PH0406USP

Box PCT  
Commissioner for Patents  
Washington, DC 20231

Preliminary Amendment

Dear Sir or Madam:

Please amend the above-identified application as follows:

In the Specification: A substitute specification and a Version with Markings to show  
Changes Made are enclosed herewith.

In the Claims: Please cancel claims 1-15 and insert new claims 16-32.

In the Abstract of the Disclosure: A substitute Abstract of the Disclosure is enclosed  
herewith.

Remarks

This Preliminary Amendment places the application text into US Style and Practice and  
removes multiple dependencies from the claims. Please calculate the Filing Fee according to this  
Preliminary Amendment.

Respectfully submitted,



M. Robert Kestenbaum  
Reg. No. 20,430  
11011 Bermuda Dunes NE  
Albuquerque, NM USA 87111  
Telephone (505) 323-0771 Facsimile (505) 323-0865

Claims

16. A method for providing quasi-continuous transmission of a temporally variable parameter to initiate an operationally related function in a control and data transmission system, comprising the following steps:  
transmitting at least one element of information at discrete time intervals via a transmission medium to a receiver, and  
determining a time characteristic of the temporarily variable parameter at least approximately in a processing device connected downstream of the receiver, by taking account of the at least one information element,  
the transmitted information being a discrete value of the temporally variable parameter and the time characteristic being determined at least approximately by taking account of at least two transmitted discrete values of the temporarily variable parameter.
17. The method as claimed in claim 16, wherein the transmitted information is a discrete value of a parameter, which defines the time characteristic of the temporarily variable parameter in a predefined manner, which initiates the operationally related function.
18. The method as claimed in claim 17, wherein the temporarily variable parameter defines the time characteristic of an allocation stored in the processing device.
19. The method as claimed in claim 16, wherein the time characteristic of the parameter is determined by interpolation.
20. The method as claimed in claim 19, wherein the interpolation is selected from linear installation, polynomial interpolation and spline interpolation.
21. The method as claimed in claim 16, wherein the operationally related function is initiated in response to the determined time characteristic of the temporarily variable parameter.



step d).

28. The method as claimed in claim 17, wherein determining the time characteristic of the temporarily variable parameter in the period between the reception of values comprises the cyclical performance of the following steps:
  - a) adding the time period which has elapsed since the last value was received to  $t_u$  to produce a time period  $t_d$ , and
  - b) determining the instantaneous value of the parameter from the time period  $t_d$  and the predefined allocation between the time period and the parameter.
29. A control and data transmission system to carry out a method as claimed in claim 16, comprising at least
  - a control device to control
  - I/O components via
  - an automation bus,
  - a processing device, which is set up for at least approximate determination of the time characteristic of the parameter, taking account of at least two information elements transmitted via the automation bus, connected to at least one I/O component, and
  - a device that performs an operationally related function in response to the time characteristic of the parameter.
30. The control and data transmission system as claimed in claim 29, wherein the processing device comprises a logic device to carry out interpolation or regression on the basis of transmitted discrete values ( $S_0, S_1, \dots S_5$ ) of the parameter to determine the time characteristic of the parameter.
31. The control and data transmission system as claimed in claim 29, wherein the processing

device comprises a device in which an allocation of the information transmitted via the bus and a time period for the time characteristic of the parameter is stored in at least one of hardware and software implementation.

32. The control and data transmission system as claimed in claim 29, wherein a sensor records the position of a driven object, said position being discretely transmitted via the bus, and the drive is controlled in response to the determined time characteristic of the position.

Rec'd PCT/PTO 23 DEC 2001

10/019868

**Method for quasi-continuous transmission of a temporally variable parameter**

**Cross-References to Related Applications**

Not applicable.

**Statement Regarding Federally Sponsored Research or Development**

Not applicable.

**Background of the Invention**

[0001] The invention relates to a method for quasi-continuous transmission of a temporally variable parameter between a transmitting and a receiving device, and a control and data transmission system to carry out the method.

**Technical Field**

[0002] Current control and data transmission systems are used in a variety of ways for automation technology. Information is transmitted from a transmitter via a transmission medium, for example a data bus, to one or more receivers. If the temporal value of a parameter changes, the need often arises to transfer the temporally varying values of the parameter to the receiver. Since the data line is designed in many cases for the communication of a plurality of bus components, continuous data transmission between the transmitter and receiver is not generally possible, wherefore the data communication must be carried out by means of the transmission of discrete values. However, the consequence of this type of transmission, for example via an automation bus such as the field bus, is that the temporally varying parameter is present in the receiver in the form of discrete values only, and continuous transmission of a continuously varying parameter often cannot be performed without blocking the communication of other bus components with a control unit and/or with other bus components. In the case of a temporally varying



parameter which is transmitted via a transmission medium to a receiver, where it is intended to initiate an operationally related function in response to its time characteristic, the problem therefore arises that no data occur between the transmission of two values of the parameters concerned.

**[0003]** For example, a parameter is transmitted once per second so that it does not adversely affect the general data transfer too much, i.e. block the latter. The response of the system may be delayed accordingly on the grounds of the time-discrete transmission by a variable time  $\delta t$ , the maximum value of which is determined by the time difference between two transmissions, i.e. is 1 second.

**[0004]** Furthermore, it may also be necessary, in particular for control tasks, for a sensor signal to be supplied as a control parameter with a substantially higher update rate to a controller input. However, this cannot usually be provided in a conventional manner by means of a data channel used in control and data processing systems.

**[0005]** One solution can be provided by routing the parameter via a direct line to the receiver, rather than via the data channel, for example a bus. However, this conflicts with the general aims of interconnecting sensors and actuators involved in a control and data processing system via the bus and controlling the system centrally. Furthermore, a cable is required between the sensor and the receiver which, for example, results in high additional cabling outlay if a plurality of positioning devices are involved and runs counter to the concept of uniform data communications via the automation bus.

#### Summary of the Invention

**[0006]** The object of the invention is therefore to eliminate the indicated disadvantages of the state of the art.

[0007] This is already achieved according to the invention by a method for providing quasi-continuous transmission of a temporally variable parameter to initiate an operationally related function in a control and data transmission system, comprising the following steps: transmitting at least one element of information at discrete time intervals via a transmission medium to a receiver, and determining a time characteristic of the temporarily variable parameter at least approximately in a processing device connected downstream of the receiver, by taking account of the at least one information element, the transmitted information being a discrete value of the temporally variable parameter and the time characteristic being determined at least approximately by taking account of at least two transmitted discrete values of the temporarily variable parameter. The object of the invention is also achieved by a control and data processing system comprising a control device to control I/O components via an automation bus, a processing device, which is set up for at least approximate determination of the time characteristic of the parameter, taking account of at least two information elements transmitted via the automation bus, connected to at least one I/O component, and a device that performs an operationally related function in response to the time characteristic of the parameter.

[0008] Information is advantageously transmitted in each case at discrete time intervals via the transmission medium between the transmitter and the receiver and, in a processing device connected downstream of the receiver device, the information is used for at least approximate calculation of the time characteristic of the parameter. In a surprisingly simple manner, at least approximate values are thus obtained for each time by utilizing one of the inventive ideas of the invention, i.e. by transmitting discrete values and by approximating or determining the time characteristic of the parameter during the period

between two transmissions. A typical threshold value switch or limit value switch can thus be supplied without interruption with an input signal, with no need for a separate connection to the sensor. The "determine the time characteristic of the parameter" or "determine the time when the parameter attains or exceeds a predefined value" processes are to be regarded here according to the invention as identical. It lies within the scope of the invention to transmit an individual value or a plurality of values simultaneously in an individual transmission. Furthermore, the time intervals between individual transmissions do not necessarily have to be equidistant.

**[0009]** If the information transmitted via the transmission medium is in each case at least one discrete value of the temporally variable parameter itself, the time characteristic of the parameter can thus be calculated in the processing device following the transmission of at least two values.

**[0010]** The entire multiplicity of essentially known methods, for example linear interpolation, polynomial interpolation or spline interpolation, can be used to approximate the time characteristic of the parameter under consideration. According to the invention, interpolation here designates the calculation of values of the parameter which may also lie outside the known interpolation points. The optimum interpolation method can be selected according to the expected time characteristic. Furthermore, it is also advantageously possible for the interpolation method to be modified through time with the increase in transmitted and therefore known values of the parameter, in order to achieve greater accuracy. For example, following an initial period of linear interpolation, it is possible to switch over to interpolation with cubic splines. In this way, the method can also be adapted according to the characteristic of the temporally variable parameter.

- [0011]** If the parameter is in a known functional relationship with time, the characteristic of the parameter can also be directly determined in the processing device if, for example an initial value has been transmitted to the processing device.
- [0012]** Operationally related functions can thus be initiated without interruption in response to the calculated characteristic, or the calculated parameter can be used as a continuous input parameter for a control circuit. Here, the term "operationally related function" designates all actions which may play a part in connection with the operation of an installation or machine, for example control of an actuator, recording by a sensor, but also collection and storage of data, etc.
- [0013]** The idea of the invention can also be used if information which is in a specific and known relationship with the time characteristic of the parameter is transferred at discrete time intervals via the bus.
- [0014]** Furthermore, in order to allow for a time delay in the calculation and therefore a time delay in the calculated characteristic of the parameter in relation to the actual characteristic, a time marker which essentially indicates the time of recording of the discrete value of the parameter, for example, can be transmitted simultaneously with the transmission of the discrete value of the parameter. The quantity of the transmission time which essentially causes the described delay can thus be determined and is compensated accordingly, so that ultimately the respective real-time characteristic of the parameter is available for further processing, corresponding to quasi-real-time transmission. The transmission of a time marker, for example to define a recording time, is particularly important for those systems which operate according to the collision procedure (e.g. CSMA/CD) for data transmission and therefore have no fixed bus transmission times.





received by the receiver device via the automation bus together with the actual characteristic shown in Fig. 2b. According to the invention, a processing device 4 which determines an approximated time characteristic from the transferred discrete values of the level conditions is connected upstream of the controller 5 of the container closure 6. In the described example, linear interpolation is carried out for this purpose, but, depending on the embodiment of the invention, higher-order polynomial interpolation, for example, or spline interpolation is also possible. The choice of interpolation is determined by the expected characteristic of the parameter which is to be approximated. The data processing of the linear interpolation which is being performed in the processing device 4 includes the steps which are to be cyclically performed in order to determine the time characteristic of the level condition:

**[0022]** formation of the difference between the last two received values of the level condition

**[0023]** division of the difference calculated according to a) by the difference between the times at which the two values were received,

**[0024]** multiplication of the result obtained according to b) by the time period elapsed since the time when the last level condition was received, and addition of the result to the last received level condition.

**[0025]** The values calculated in this way are shown on the continuous curve in Fig. 2b), which itself represents the actual characteristic, in the form of linear segments  $S_0$ ,  $S_1$ ,  $S_2$ , ...  $S_4$ . This approximation is carried out cyclically until a further discrete value of the level condition occurs, this level condition defining the instantaneous value, whereupon the described approximation is restarted. A special method ensures that the transition from the approximated to the newly received level condition, in contrast to the linear

[0027] However, in other embodiments of the invention, the transmission time to transfer the discrete value of the parameter to the receiver device is not negligible. An example of this type is shown in Fig. 3. The curve shown in Fig. 3a describes the shift of a workpiece in one dimension by means of a drive, whereby the drive is intended to be de-activated on reaching a predefined position  $Y=G$ . Similar to the first example, the components form part of an automation system. The position sensor is connected via a bus component to a serial ring bus system according to EN 50254, via which data can be exchanged with the controller or via the controller with other bus components. The bus component allocated to the sensor transfers discrete positions  $Y(t_1)$ ,  $Y(t_2)$ , ...  $Y(t_n)$  at discrete time intervals to



**[0029]** According to the invention, this lag in the time function compared with the actual time characteristic of the position Y of the workpiece is compensated by taking account of the bus transmission time  $t_u$  when calculating the time function. In the case of linear interpolation, not only the time period which has elapsed since the time when the last value was received, but also bus transmission time  $t_u$  is also included as a multiplier.  $t_u$  is defined, for example, either by the simultaneous transmission of a time marker, with the

aid of which the transmission time is defined through comparison with a time marker on reception, or by single measurement of the bus transmission time. The single definition is frequently adequate, particularly in the case of a serial field bus system according to EN 50254, since the bus cycle time is normally constant in a system of this type.

**[0030]** The time function calculated in this way is shown in the curve designated as B in Fig. 3b. The position signal Y applied to the drive controller thus corresponds at all times to the actual sensor signal (see Fig. 3a), resulting in the required accurate positioning of the workpiece.

**[0031]** In a further embodiment, in contrast to the last embodiment, a drive parameter rather than the position itself is transferred at discrete time intervals via the bus. The position of the object can be unambiguously calculated at all times by means of this parameter. The determined relationship between the drive parameter and the position is stored in the processing device, for example in the form of an allocation table or a formula implemented by means of hardware or software. In the present example, this drive parameter is the power supplied to the drive. The displacement and therefore the position of the object can be determined via an allocation matrix stored in the processing device with a predefined supply duration of the predefined power, whereby the drive is set in such a way that it accelerates the object up to a predefined speed of 1 m/s and then maintains his speed.

### Abstract of the Disclosure

The invention relates to a method for quasi-continuous transmission of a temporally variable parameter between a transmitter and a receiver. In order to provide the time characteristic of the parameter for initiating an operationally related function, said characteristic is determined at least approximately on the basis of the transmitted information in a processing device connected downstream of the receiver.

"Version with Markings to show Changes Made"

**Method for quasi-continuous transmission of a temporally variable parameter**

Cross-References to Related Applications

Not applicable.

Statement Regarding Federally Sponsored Research or Development

Not applicable.

Background of the Invention

[0001] The invention relates to a method for quasi-continuous transmission of a temporally variable parameter between a transmitting and a receiving device, and a control and data transmission system to carry out the method.

Technical Field

[0002] Current control and data transmission systems are used in a variety of ways for automation technology. Information is transmitted from a transmitter via a transmission medium, for example a data bus, to one or more receivers. If the temporal value of a parameter changes, the need often arises to transfer the temporally varying values of the parameter to the receiver. Since the data line is designed in many cases for the communication of a plurality of bus components, continuous data transmission between the transmitter and receiver is not generally possible, wherefore the data communication must be carried out by means of the transmission of discrete values. However, the consequence of this type of transmission, for example via an automation bus such as the field bus, is that the temporally varying parameter is present in the receiver in the form of discrete values only, and continuous transmission of a continuously varying parameter often cannot be performed without blocking the communication of other bus components

with a control unit and/or with other bus components. In the case of a temporally varying parameter which is transmitted via a transmission medium to a receiver, where it is intended to initiate an operationally related function in response to its time characteristic, the problem therefore arises that no data occur between the transmission of two values of the parameters concerned.

[0003] For example, a parameter is transmitted once per second so that it does not adversely affect the general data transfer too much, i.e. block the latter. The response of the system may be delayed accordingly on the grounds of the time-discrete transmission by a variable time  $\delta t$ , the maximum value of which is determined by the time difference between two transmissions, i.e. is 1 second.

[0004] Furthermore, it may also be necessary, in particular for control tasks, for a sensor signal to be supplied as a control parameter with a substantially higher update rate to a controller input. However, this cannot usually be provided in a conventional manner by means of a data channel used in control and data processing systems.

[0005] One solution can be provided by routing the parameter via a direct line to the receiver, rather than via the data channel, for example a bus. However, this conflicts with the general aims of interconnecting sensors and actuators involved in a control and data processing system via the bus and controlling the system centrally. Furthermore, a cable is required between the sensor and the receiver which, for example, results in high additional cabling outlay if a plurality of positioning devices are involved and runs counter to the concept of uniform data communications via the automation bus.

### Summary of the Invention

[0006] The object of the invention is therefore to eliminate the indicated disadvantages of the

state of the art.

[0007] This is already achieved according to the invention by a method [with the features of claim 1 and] for providing quasi-continuous transmission of a temporally variable parameter to initiate an operationally related function in a control and data transmission system, comprising the following steps: transmitting at least one element of information at discrete time intervals via a transmission medium to a receiver, and determining a time characteristic of the temporarily variable parameter at least approximately in a processing device connected downstream of the receiver, by taking account of the at least one information element, the transmitted information being a discrete value of the temporally variable parameter and the time characteristic being determined at least approximately by taking account of at least two transmitted discrete values of the temporarily variable parameter. The object of the invention is also achieved by a control and data processing system [to carry out the method with the features of claim 13] comprising a control device to control I/O components via an automation bus, a processing device, which is set up for at least approximate determination of the time characteristic of the parameter, taking account of at least two information elements transmitted via the automation bus, connected to at least one I/O component, and a device that performs an operationally related function in response to the time characteristic of the parameter..

[0008] Information is advantageously transmitted in each case at discrete time intervals via the transmission medium between the transmitter and the receiver and, in a processing device connected downstream of the receiver device, the information is used for at least approximate calculation of the time characteristic of the parameter. In a surprisingly

**[0010]** The entire multiplicity of essentially known methods, for example linear interpolation, polynomial interpolation or spline interpolation, can be used to approximate the time characteristic of the parameter under consideration. According to the invention, interpolation here designates the calculation of values of the parameter which may also lie outside the known interpolation points. The optimum interpolation method can be selected according to the expected time characteristic. Furthermore, it is also advantageously possible for the interpolation method to be modified through time with the increase in transmitted and therefore known values of the parameter, in order to

**[0012]** Operationally related functions can thus be initiated without interruption in response to the calculated characteristic, or the calculated parameter can be used as a continuous input parameter for a control circuit. Here, the term "operationally related function" designates all actions which may play a part in connection with the operation of an installation or machine, for example control of an actuator, recording by a sensor, but also collection and storage of data, etc.

**[0014]** Furthermore, in order to allow for a time delay in the calculation and therefore a time delay in the calculated characteristic of the parameter in relation to the actual characteristic, a time marker which essentially indicates the time of recording of the discrete value of the parameter, for example, can be transmitted simultaneously with the transmission of the discrete value of the parameter. The quantity of the transmission time which essentially causes the described delay can thus be determined and is compensated accordingly, so that ultimately the respective real-time characteristic of the parameter is available for further processing, corresponding to quasi-real-time transmission. The



transmission of a time marker, for example to define a recording time, is particularly important for those systems which operate according to the collision procedure (e.g. CSMA/CD) for data transmission and therefore have no fixed bus transmission times. The individual bus transmission time for each individual transmission can thus be determined with the simultaneous transfer of the relevant time marker and can be taken into account in calculating the time characteristic of the parameter.

[0015] The method according to the invention can essentially be used in all known control and data transmission systems in which data are transferred via a common data line, but also quite generally in discrete transmissions between a transmitter and a receiver, if an action is to be initiated in a device connected downstream of the receiver in response to the time characteristic of a signal.

#### Brief Description of the Drawings

[0016] The invention is explained below by describing a number of embodiments, based on the attached drawings, in which:

[0017] Fig. 1 is a block diagram showing a section of a basic device for carrying out the method according to the invention,

[0018] Fig. 2 shows a first example of a temporally variable parameter (Fig. 2a) and its approximation according to the invention (Fig. 2b), and

[0019] Fig. 3 shows a second example of a temporally variable parameter (Fig. 3a) and its approximation (Fig. 3b).

#### Detailed Description of the Invention

[0020] Fig. 1 shows the principle of the invention. A temporally variable parameter  $S = F(t)$  is recorded and transferred from a transmitting device 1 via a transmission medium or a

Werner  
(H) 01PH0406USP

between the discrete values is 1 minute, so that the time to transmit the value via the serial field bus which is used is negligible, since the transmission times in systems of this type are typically within the millisecond range. The discrete values of the parameter  $S(t_i)$  received by the receiver device via the automation bus together with the actual characteristic shown in Fig. 2b. According to the invention, a processing device 4 which determines an approximated time characteristic from the transferred discrete values of the level conditions is connected upstream of the controller 5 of the container closure 6. In the described example, linear interpolation is carried out for this purpose, but, depending on the embodiment of the invention, higher-order polynomial interpolation, for example, or spline interpolation is also possible. The choice of interpolation is determined by the expected characteristic of the parameter which is to be approximated. The data processing of the linear interpolation which is being performed in the processing device 4 includes the steps which are to be cyclically performed in order to determine the time characteristic of the level condition:

**[0022]** formation of the difference between the last two received values of the level condition

**[0023]** division of the difference calculated according to a) by the difference between the times at which the two values were received,

**[0024]** multiplication of the result obtained according to b) by the time period elapsed since the time when the last level condition was received, and addition of the result to the last received level condition.

**[0025]** The values calculated in this way are shown on the continuous curve in Fig. 2b), which itself represents the actual characteristic, in the form of linear segments  $S_0, S_1, S_2, \dots S_4$ . This approximation is carried out cyclically until a further discrete value of the

[0027] However, in other embodiments of the invention, the transmission time to transfer the discrete value of the parameter to the receiver device is not negligible. An example of this type is shown in Fig. 3. The curve shown in Fig. 3a describes the shift of a workpiece in one dimension by means of a drive, whereby the drive is intended to be de-activated on reaching a predefined position  $Y=G$ . Similar to the first example, the components form part of an automation system. The position sensor is connected via a bus component to a

serial ring bus system according to EN 50254, via which data can be exchanged with the controller or via the controller with other bus components. The bus component allocated to the sensor transfers discrete positions  $Y(t_1)$ ,  $Y(t_2)$ , ...  $Y(t_n)$  at discrete time intervals to the receiver device, to which a processing device is connected. The transmission speed and the number of bus components determine a transmission period from one bus component to the other of around 2 milliseconds. In these observations, the transmission times from the sensor to the transmitter, or possible processing times, for example to provide a digital signal at the transmitting end, and also processing times at the receiving end are not taken into account, since they are generally negligible compared with the aforementioned bus transmission time. For the example of the positioning of an object, whereby the position is recorded with a sensor and transmitted via the bus with a bus cycle time of two milliseconds to a receiver and a downstream controller, which deactivates the drive on reaching a predefined position, this means that the object has been moved by a maximum of two millimeters too far if the drive moves the object at one meter per second. However, high positioning inaccuracy of this type is unacceptable for most shift drives, for example for motherboard assembly.

**[0028]** Fig. 3b shows the time function calculated in the processing device on the curve designated by the letter A. Compared with the curve shown in Fig. 3a, which shows the actual characteristic of the position with the values  $Y_0$ ,  $Y_1$ , ...  $Y_5$  recorded at times  $t_i$ , the described temporal delay corresponding to the bus transmission time  $t_u$  is evident.

**[0029]** According to the invention, this lag in the time function compared with the actual time characteristic of the position  $Y$  of the workpiece is compensated by taking account of the bus transmission time  $t_u$  when calculating the time function. In the case of linear

interpolation, not only the time period which has elapsed since the time when the last value was received, but also bus transmission time  $t_u$  is also included as a multiplier.  $t_u$  is defined, for example, either by the simultaneous transmission of a time marker, with the aid of which the transmission time is defined through comparison with a time marker on reception, or by single measurement of the bus transmission time. The single definition is frequently adequate, particularly in the case of a serial field bus system according to EN 50254, since the bus cycle time is normally constant in a system of this type.

**[0030]** The time function calculated in this way is shown in the curve designated as B in Fig. 3b. The position signal Y applied to the drive controller thus corresponds at all times to the actual sensor signal (see Fig. 3a), resulting in the required accurate positioning of the workpiece.

**[0031]** In a further embodiment, in contrast to the last embodiment, a drive parameter rather than the position itself is transferred at discrete time intervals via the bus. The position of the object can be unambiguously calculated at all times by means of this parameter. The determined relationship between the drive parameter and the position is stored in the processing device, for example in the form of an allocation table or a formula implemented by means of hardware or software. In the present example, this drive parameter is the power supplied to the drive. The displacement and therefore the position of the object can be determined via an allocation matrix stored in the processing device with a predefined supply duration of the predefined power, whereby the drive is set in such a way that it accelerates the object up to a predefined speed of 1 m/s and then maintains his speed.

### Abstract of the Disclosure

The invention relates to a method for quasi-continuous transmission of a temporally variable parameter between a transmitter and a receiver. In order to provide the time characteristic of the parameter for initiating an operationally related function, said characteristic is determined at least approximately on the basis of the transmitted information in a processing device connected downstream of the receiver.

ENGLISH

531 Rec'd PCT/E  
TRANSLATION  
01PH 0406USP

23 DEC 2001

Phoenix Contact GmbH &amp; Co

3/PRTS

Method for quasi-continuous transmission of a temporally  
variable parameter

The invention relates to a method for quasi-continuous  
5 transmission of a temporally variable parameter between a  
transmitting and a receiving device, and a control and data  
transmission system to carry out the method.

Current control and data transmission systems are used  
in a variety of ways for automation technology. Information  
10 is transmitted from a transmitter via a transmission medium,  
for example a data bus, to one or more receivers. If the  
temporal value of a parameter changes, the need often arises  
to transfer the temporally varying values of the parameter to  
the receiver. Since the data line is designed in many cases  
15 for the communication of a plurality of bus components,  
continuous data transmission between the transmitter and  
receiver is not generally possible, wherefore the data  
communication must be carried out by means of the  
transmission of discrete values. However, the consequence of  
20 this type of transmission, for example via an automation bus  
such as the field bus, is that the temporally varying  
parameter is present in the receiver in the form of discrete  
values only, and continuous transmission of a continuously  
varying parameter often cannot be performed without blocking  
25 the communication of other bus components with a control unit  
and/or with other bus components. In the case of a temporally  
varying parameter which is transmitted via a transmission  
medium to a receiver, where it is intended to initiate an



operationally related function in response to its time characteristic, the problem therefore arises that no data occur between the transmission of two values of the parameters concerned.

- 5 For example, a parameter is transmitted once per second so that it does not adversely affect the general data transfer too much, i.e. block the latter. The response of the system may be delayed accordingly on the grounds of the time-discrete transmission by a variable time  $\delta t$ , the maximum  
10 value of which is determined by the time difference between two transmissions, i.e. is 1 second.

Furthermore, it may also be necessary, in particular for control tasks, for a sensor signal to be supplied as a control parameter with a substantially higher update rate to  
15 a controller input. However, this cannot usually be provided in a conventional manner by means of a data channel used in control and data processing systems.

One solution can be provided by routing the parameter via a direct line to the receiver, rather than via the data  
20 channel, for example a bus. However, this conflicts with the general aims of interconnecting sensors and actuators involved in a control and data processing system via the bus and controlling the system centrally. Furthermore, a cable is required between the sensor and the receiver which, for  
25 example, results in high additional cabling outlay if a plurality of positioning devices are involved and runs counter to the concept of uniform data communications via the automation bus.

The object of the invention is therefore to eliminate  
30 the indicated disadvantages of the state of the art.

This is already achieved according to the invention by a method with the features of claim 1 and a control and data processing system to carry out the method with the features

of claim 13.

Information is advantageously transmitted in each case at discrete time intervals via the transmission medium between the transmitter and the receiver and, in a processing  
5 device connected downstream of the receiver device, the information is used for at least approximate calculation of the time characteristic of the parameter. In a surprisingly simple manner, at least approximate values are thus obtained for each time by utilizing one of the inventive ideas of the  
10 invention, i.e. by transmitting discrete values and by approximating or determining the time characteristic of the parameter during the period between two transmissions. A typical threshold value switch or limit value switch can thus be supplied without interruption with an input signal, with  
15 no need for a separate connection to the sensor. The "determine the time characteristic of the parameter" or "determine the time when the parameter attains or exceeds a predefined value" processes are to be regarded here according to the invention as identical. It lies within the scope of  
20 the invention to transmit an individual value or a plurality of values simultaneously in an individual transmission. Furthermore, the time intervals between individual transmissions do not necessarily have to be equidistant.

If the information transmitted via the transmission  
25 medium is in each case at least one discrete value of the temporally variable parameter itself, the time characteristic of the parameter can thus be calculated in the processing device following the transmission of at least two values.

The entire multiplicity of essentially known methods,  
30 for example linear interpolation, polynomial interpolation or spline interpolation, can be used to approximate the time characteristic of the parameter under consideration. According to the invention, interpolation here designates the

calculation of values of the parameter which may also lie outside the known interpolation points. The optimum interpolation method can be selected according to the expected time characteristic. Furthermore, it is also  
5 advantageously possible for the interpolation method to be modified through time with the increase in transmitted and therefore known values of the parameter, in order to achieve greater accuracy. For example, following an initial period of linear interpolation, it is possible to switch over to  
10 interpolation with cubic splines. In this way, the method can also be adapted according to the characteristic of the temporally variable parameter.

If the parameter is in a known functional relationship with time, the characteristic of the parameter can also be  
15 directly determined in the processing device if, for example an initial value has been transmitted to the processing device.

Operationally related functions can thus be initiated without interruption in response to the calculated  
20 characteristic, or the calculated parameter can be used as a continuous input parameter for a control circuit. Here, the term "operationally related function" designates all actions which may play a part in connection with the operation of an installation or machine, for example control of an actuator,  
25 recording by a sensor, but also collection and storage of data, etc.

The idea of the invention can also be used if information which is in a specific and known relationship with the time characteristic of the parameter is transferred  
30 at discrete time intervals via the bus.

Furthermore, in order to allow for a time delay in the calculation and therefore a time delay in the calculated characteristic of the parameter in relation to the actual

characteristic, a time marker which essentially indicates the time of recording of the discrete value of the parameter, for example, can be transmitted simultaneously with the transmission of the discrete value of the parameter. The quantity of the transmission time which essentially causes the described delay can thus be determined and is compensated accordingly, so that ultimately the respective real-time characteristic of the parameter is available for further processing, corresponding to quasi-real-time transmission.

10 The transmission of a time marker, for example to define a recording time, is particularly important for those systems which operate according to the collision procedure (e.g. CSMA/CD) for data transmission and therefore have no fixed bus transmission times. The individual bus transmission time

15 for each individual transmission can thus be determined with the simultaneous transfer of the relevant time marker and can be taken into account in calculating the time characteristic of the parameter.

The method according to the invention can essentially be used in all known control and data transmission systems in which data are transferred via a common data line, but also quite generally in discrete transmissions between a transmitter and a receiver, if an action is to be initiated in a device connected downstream of the receiver in response to the time characteristic of a signal.

The invention is explained below by describing a number of embodiments, based on the attached drawings, in which:

Fig. 1 is a block diagram showing a section of a basic device for carrying out the method according to the invention,

Fig. 2 shows a first example of a temporally variable parameter (Fig. 2a) and its approximation according to the invention (Fig. 2b), and

Fig. 3 shows a second example of a temporally variable parameter (Fig. 3a) and its approximation (Fig. 3b).

Fig. 1 shows the principle of the invention. A temporally variable parameter  $S = F(t)$  is recorded and transferred from a transmitting device 1 via a transmission medium or a transmission path 2 to a receiver device 3. This transfer is carried out at discrete time intervals, so that discrete values of the parameter  $S$ , i.e.  $S(t_0)$ ,  $S(t_1)$ ,  $S(t_2)$ , ...  $S(t_n)$  occur at the receiver 3. A processing device 4, to which the received values are in each case forwarded, is connected downstream of the receiver 3. The time characteristic of the parameter  $S(t)$  is approximated in this processing device 4 from the received discrete values by means of linear interpolation. The time characteristic, i.e. the value of the parameter under consideration at any given time, is thus available, or the time when the parameter attains a predefined value can be indicated. An operationally related function is initiated in response to the characteristic or the specified time.

The characteristic of a typical signal in a specific embodiment of the invention is shown in Fig. 2. Here, Fig. 2a represents the signal  $S(t)$  of a sensor which measures the level of liquid in a container. The quantity of liquid in the container increases through time and is intended to be reduced by removing it from the container when a predefined limit  $G$  is attained. To do this, the container outlet is controlled at the predefined time. The components form part of a control and data transmission system, whereby the sensor is connected via a bus component 1 to the automation bus 2 (Fig. 1). The control of the container closure is connected via a further bus component 3 to the automation bus 2 and the central system controller. For



were received,

- c) multiplication of the result obtained according to b) by the time period elapsed since the time when the last level condition was received, and addition of the result to the last received level condition.

The values calculated in this way are shown on the continuous curve in Fig. 2b), which itself represents the actual characteristic, in the form of linear segments  $S_0$ ,  $S_1$ ,  $S_2$ , ...  $S_n$ . This approximation is carried out cyclically until a further discrete value of the level condition occurs, this level condition defining the instantaneous value, whereupon the described approximation is restarted. A special method ensures that the transition from the approximated to the newly received level condition, in contrast to the linear segment characteristic shown in Fig. 2b), does not run discontinuously. The level condition characteristic generated as described is fed as an input parameter to the container closure controller. During the calculation, the last-calculated value is in each case maintained constant as a controller input parameter by means of a special hold circuit, until a newly calculated value occurs. When the predefined level condition  $G$  is attained, the closure is opened. As shown in Fig. 2b, the calculated level condition shown by the corresponding linear segment  $S_i$  attains the limit value  $G$  approximately at time  $t_x$ , at which the liquid container closure is then opened. Without approximation of the time function, the closure would not take place until time  $t_d$ , i.e. following the transfer of the subsequent discrete level condition and therefore too late.

- In a different embodiment of the invention, the processing device does not calculate the time function, but, by means of linear interpolation, the time when the predefined limit level condition  $G$  is attained. This

calculation is performed in a similar manner to the calculation of the time function, and consequently requires no further explanation.

However, in other embodiments of the invention, the transmission time to transfer the discrete value of the parameter to the receiver device is not negligible. An example of this type is shown in Fig. 3. The curve shown in Fig. 3a describes the shift of a workpiece in one dimension by means of a drive, whereby the drive is intended to be de-activated on reaching a predefined position  $Y=G$ . Similar to the first example, the components form part of an automation system. The position sensor is connected via a bus component to a serial ring bus system according to EN 50254, via which data can be exchanged with the controller or via the controller with other bus components. The bus component allocated to the sensor transfers discrete positions  $Y(t_1)$ ,  $Y(t_2)$ , ...  $Y(t_n)$  at discrete time intervals to the receiver device, to which a processing device is connected. The transmission speed and the number of bus components determine a transmission period from one bus component to the other of around 2 milliseconds. In these observations, the transmission times from the sensor to the transmitter, or possible processing times, for example to provide a digital signal at the transmitting end, and also processing times at the receiving end are not taken into account, since they are generally negligible compared with the aforementioned bus transmission time. For the example of the positioning of an object, whereby the position is recorded with a sensor and transmitted via the bus with a bus cycle time of two milliseconds to a receiver and a downstream controller, which de-activates the drive on reaching a predefined position, this means that the object has been moved by a maximum of two millimeters too far if the drive moves the object at one





times by means of this parameter. The determined relationship between the drive parameter and the position is stored in the processing device, for example in the form of an allocation table or a formula implemented by means of hardware or  
5 software. In the present example, this drive parameter is the power supplied to the drive. The displacement and therefore the position of the object can be determined via an allocation matrix stored in the processing device with a predefined supply duration of the predefined power, whereby  
10 the drive is set in such a way that it accelerates the object up to a predefined speed of 1 m/s and then maintains his speed.

ART 34 AMDT

10/019868

Phoenix Contact GmbH &amp; Co

01PH 0406USP

531 Rec'd PCT/ 23 DEC 2001

ANNEXES

Claims

1. A method for providing quasi-continuous transmission of a temporally variable parameter to initiate an operationally related function in a control and data transmission system, comprising the following steps:
- transmission of at least one information element (S, Y) at discrete time intervals via a transmission medium (2) to the receiver device (3), and
  - determination of the time characteristic of the parameter at least approximately in a processing device (4) connected downstream of the receiver device (3), by taking account of at least one information element, the transmitted information being a discrete value of the temporally variable parameter ( $S(t_i)$ ) and the time characteristic being determined at least approximately by taking account of at least two transmitted discrete values of the parameter.
2. The method as claimed in claim 1, characterized in that the transmitted information is a discrete value of a parameter which, in a predefined manner, in particular by means of an allocation stored in the processing device, defines the time characteristic of the parameter which initiates the operationally related function.

ART 34 AMDT

3. The method as claimed in claim 1 or 2,  
characterized in that  
the determination of the time characteristic of the  
parameter comprises interpolation, for example linear  
installation, polynomial interpolation or spline  
interpolation.
4. The method as claimed in one of claims 1 to 3,  
characterized in that  
an operationally related function is initiated in  
response to the calculated time characteristic of the  
parameter.
5. The method as claimed in one of claims 1 to 4,  
characterized in that  
the determined parameter is used as an input  
parameter for a control circuit.
6. The method as claimed in one of claims 1 to 5,  
characterized in that  
the operationally related function is initiated at  
a time  $t_x$ , at which the determined parameter attains or  
exceeds a predefined limited value.
7. The method as claimed in one of claims 1 to 6,  
characterized in that  
the parameter is a measure of the position of an  
object driven to movement, and the drive is de-activated  
to achieve a predefined position of the object.
8. The method as claimed in one of claims 1 to 7,

ART 34 AMDT

characterized in that  
a time marker is transmitted to the receiver  
simultaneously with the parameter or information.

- 5           9.    The method as claimed in one of claims 1 to 8,  
              characterized in that,  
              in determining the time characteristic of the  
parameter, a time shift  $t_0$  occurs which essentially  
corresponds to the time delay caused by the transmission  
10           of the information via the transmission medium.
10.   The method as claimed in claims 2 and 9,  
              characterized in that  
              the determination of the time characteristic of the  
15           parameter in the period between the reception of values  
comprises the cyclical performance of the following  
steps:
- a) formation of the difference between the last two  
received or calculated values of the parameter  
20           b) division of the difference calculated according  
to a) by the difference between the times at which the  
two values were received,
- c) addition of the time period elapsed since the  
time when the last value of the parameter to  $t_0$  was  
25           received,
- d) multiplication of the results obtained according  
to b) and c),
- e) addition of the last obtained value of the  
parameter to the result calculated according to d).
- 30           11.   The method as claimed in claims 2 and 9,  
              characterized in that

the determination of the time characteristic of the parameter in the period between the reception of values comprises the cyclical performance of the following steps:

- 5           a) addition of the time period which has elapsed since the last value was received to  $t_0$  to produce a time period  $t_1$ ,  
          b) determination of the instantaneous value of the parameter from the time period  $t_1$  and the predefined  
10           allocation between the time period and the parameter.

12. A control and data transmission system to carry out a method as claimed in one of claims 1 to 11, comprising at least

- 15           - a control device to control  
          - I/O components (1, 3) via  
          - an automation bus (2),  
          characterized in that  
          a processing device (4), which is set up for at  
20           least approximate determination of the time characteristic of the parameter, taking account of at least two information elements transmitted via the bus, is connected to at least one I/O component (3),  
          furthermore comprising a device (5) which performs  
25           an operationally related function in response to the time characteristic of the parameter.

13. The control and data transmission system as claimed in claim 12,

- 30           characterized in that  
          the processing device (4) comprises a logic device to carry out interpolation or regression on the basis of transmitted discrete values ( $S_0, S_1, \dots, S_5$ ) of the

parameter to determine the time characteristic of the parameter.

14. The control and data transmission system as claimed in claim 12,

characterized in that

the processing device (4) comprises a device in which an allocation of the information transmitted via the bus and a time period for the time characteristic of the parameter is stored in a hardware and/or software implementation.

15. The control and data transmission system as claimed in claims 12 to 14,

characterized in that

a sensor records the position of a driven object, said position being discretely transmitted via the bus, and the drive can be controlled in response to the determined time characteristic of the position.

Abstract

The invention relates to a method for quasi-continuous transmission of a temporally variable parameter between a transmitter and a receiver.

- 5 In order to provide the time characteristic of the parameter for initiating an operationally related function, said characteristic is determined at least approximately on the basis of the transmitted information in a processing device connected downstream of the receiver.



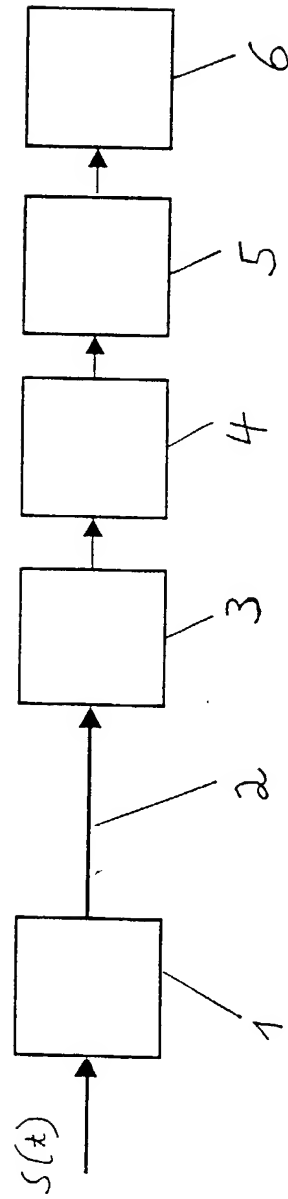


Fig. 1

10/019868

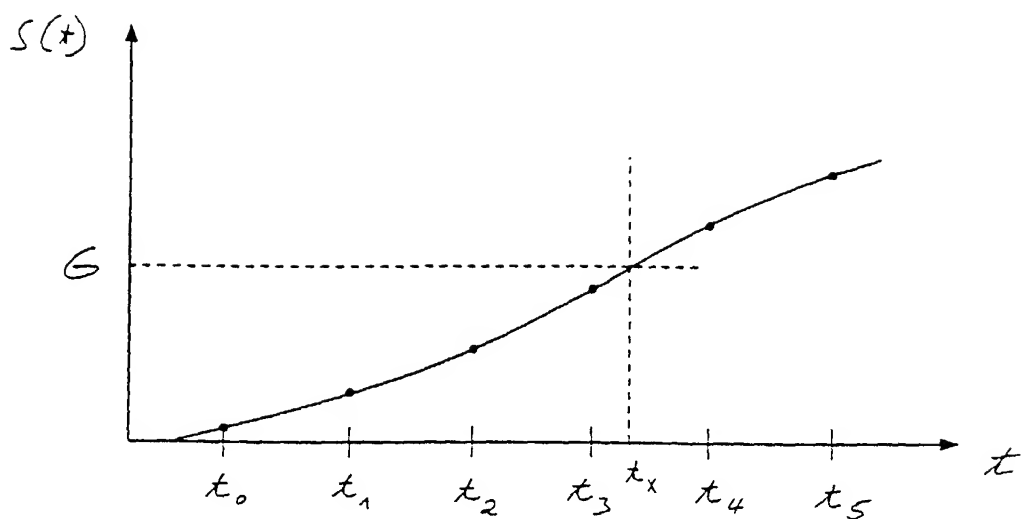


Fig. 2 a)

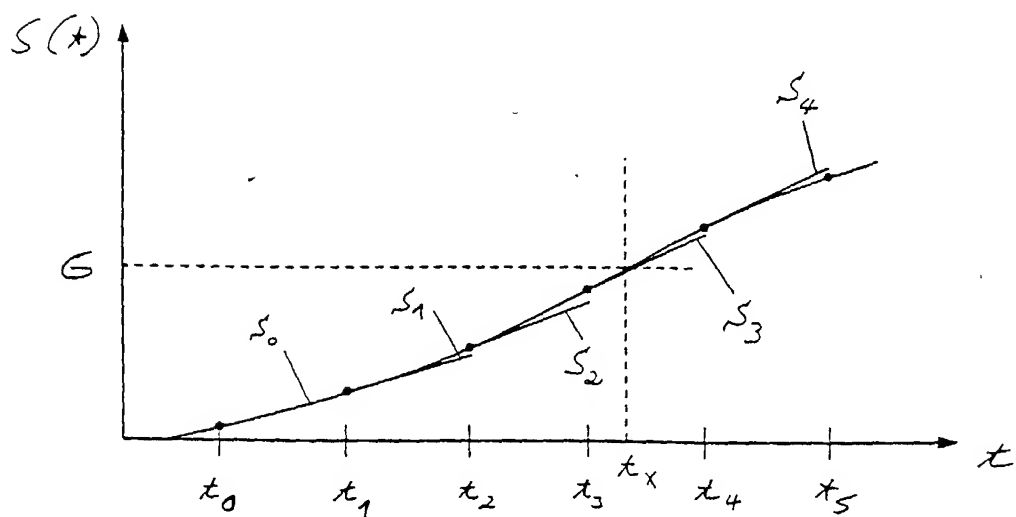


Fig. 2 b)

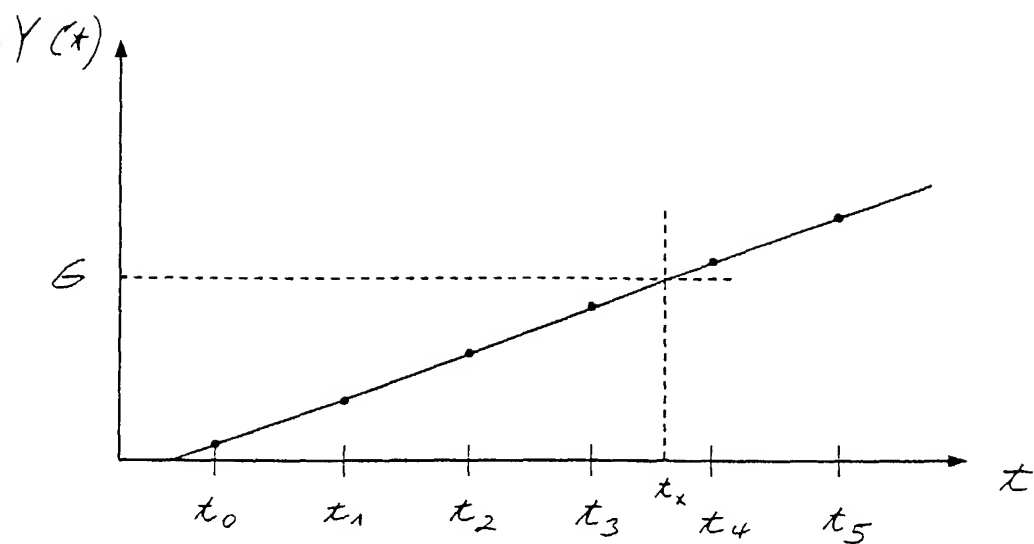


Fig. 3 a)

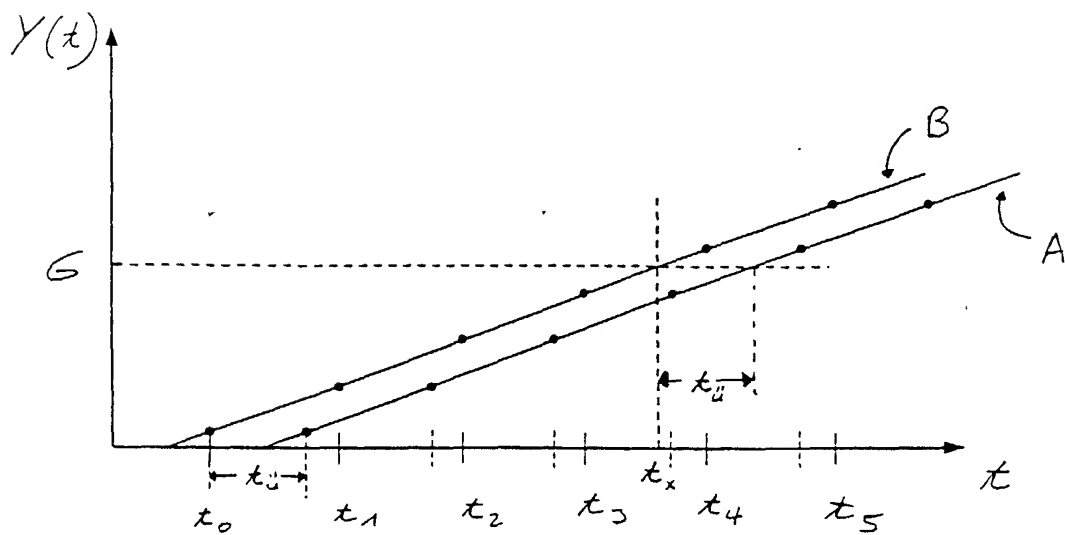


Fig. 3 b)

Express Mail Label No.

Page 1 of 3

Docket No.  
(H)01PH0406USP

## Declaration and Power of Attorney For Patent Application

### English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled  
**Method for Quasi-Continuous Transmission of a Temporally Variable Parameter**

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on June 30, 2000 as United States Application No. or PCT International Application Number PCI/DE00/02047 and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

199 30 822.5

Germany

03/07/1999

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37. C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

M. Robert Kestenbaum Reg. No. 20,430

Send Correspondence to: M. Robert Kestenbaum  
11011 Bermuda Dunes NE  
Albuquerque, NM USA 87111

Direct Telephone Calls to: *(name and telephone number)*  
M. Robert Kestenbaum (505) 323-0771 Fax (505) 323-0865

Full name of sole or first inventor <u>Burkhard WERNER</u>	<u>27.06.2002</u>
Sole or first inventor's signature <u>Burkhard Werner</u>	Date
Residence <u>Hauptstrasse 100a, D-33758 Schloss Holte-Stukenbrock, Germany</u>	
Citizenship <u>German</u>	
Post Office Address <u>Hauptstrasse 100a, D-33758 Schloss Holte-Stukenbrock, Germany</u>	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	